

No:-RIT/645/2025-D1

Office of the Principal
Rajiv Gandhi Institute of Technology,
Kottayam
Dated 19-09-2025

NOTICE

Quotation No: - 05/2025-26

Sealed quotations are invited for the **supply of Various Maters to Electrical Machine Lab of Electrical and Electronics Engineering Department** as. Detailed below.

Specified in the schedule attached below/overleaf. The rates quoted should be for delivery of the articles at the place mentioned below the schedule. The necessary superscription, due date for the receipt of quotations, the date up to which the rates will have to remain firm for acceptance and the name and address of officer to whom the quotation is to be sent are noted below. Any quotation received after the time fixed on the due date is liable to be rejected. The maximum period required for delivery of the articles should also be mentioned. Quotations not stipulating period of firmness and with price variation clause and/or 'subject to prior sale' condition are liable to be rejected.

The prices quoted should be inclusive of all taxes, duties, cesses, etc. which are or may become payable by the contractor under existing or future law or rules of the country of origin/supply or delivery during the course of execution of the contract. Special conditions, if any, printed on the quotation sheets or attached with the quotation will not be applicable to the contract unless they are expressly accepted in writing by the purchaser. (GSTIN- 32AAAGP0670C1ZW).

Superscription: RIT/645/2025-D1 Purchase of Various Equipment to Electrical Machine Lab of Electrical and Electronics Engineering Department.

No : 05/2025-26

Due date and time for receipt of quotations : 30.09.2025, 2.00 PM


Date and Time for opening Quotation : 30.09.2025, 3.00 PM

Date up to which the rates are to remain firm for acceptance : 31/03/2026

Designation and address of Officer whom the quotation is to be addressed: Principal, Rajiv Gandhi Institute of Technology,
Kottayam

Place: Kottayam

Date: 19-09-2025

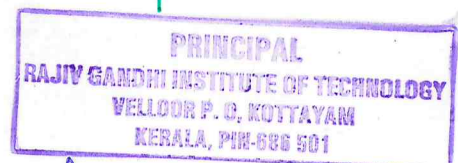

Details of Various Equipment to Electrical Department (Detailed Specification attached).

Serial Number	Articles with full description and accurate specification	Quantity required in Nos.
1	Voltmeter (Moving Iron) 0-150-300-600, Volts , .Portable moving iron AC meters, laboratorytype, housed in backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedgepointer. Scale length 150mm. Accuracyclass 1,($\pm 1\%$ of full scale deflection as per ISS 1248/2003) Sensitivity : 200 ohms/volts	2
2	Voltmeter (Moving Iron) 0-150-300 Volts . Portable moving iron AC meters, laboratorytype, housed in backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedgepointer. Scale length 150mm. Accuracyclass 1,($\pm 1\%$ of full scale deflection as per ISS 1248/2003) Sensitivity : 200 ohms/volts	2
3	Ammeter (Moving coil) 0-1-2, Amps , Portable moving coil meters, laboratorytype, housed in backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedgepointer. Scale length 140 mm. Accuracyclass 1,($\pm 1\%$ of full scale deflection as per ISS 1248/2003) Sensitivity : 200 ohms/volts	2
4	Ammeter (Moving Iron) 0-5-10 Amps , Portable moving iron AC meters, laboratorytype, housed in backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedgepointer. Scale length 140 mm. Accuracyclass 1,($\pm 1\%$ of full scale deflection as per ISS 1248/2003) Sensitivity : 200 ohms/volts	2
5	Ammeter (Moving Iron) 0-15-30 Amps , Portable moving iron AC meters, laboratorytype, housed in backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedgepointer. Scale length 140 mm. Accuracyclass 1,($\pm 1\%$ of full scale deflection as per ISS 1248/2003) Sensitivity : 200 ohms/volts	2
6	Digital Contact Tachometer : RPM range from 0 to 5000 RPM, and surface speeds from 6 to 5000 m/min, accuracy of $\pm 0.05\% + 1$ digit	1
7	WATTMETER(LPF): 0-125-250-500V,10-20A,0.2pf , Dynamometer type Portable, laboratory type,housed in laminated backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedge pointer. Scale length 140mm. Accuracy $\pm 1\%$ of full scale deflection as pr 1248/84.	4
8	WATTMETERS:125/250/500V,10/20A,UPF Dynamometer type Portable, laboratory type,housed in laminated backlite cabinet with detachable LID, leather belt and rubber shoesfor horizontal use with mirror scale and knifeedge pointer. Scale length 140mm. Accuracy $\pm 1\%$ of full scale deflection as pr 1248/84.	3



Terms & Conditions: -

- 1. The quotation number & reference number should be superscribed in the sealed quotation cover.**
- 2. Rate should be quoted for the item.**
- 3. The payment will be made after the satisfactory completion of the supply & verification by the department.**

Place: Kottayam

Date: 19-09-2025

Signed by

Prince A

Date: 19-09-2025 14:10:55



Dr Prince A

Principal

